

L0MW0301 Solenoid Module Pempek OBP Intrinsically Safe I/O 12 Bit Resistive Inputs Type A

The Pempek OBP Mining PLC I.S. I/O Module provides intrinsically-safe (Group I Ex ib) input and output resources in a single, compact unit.

A unique fibre-optic communications interface means that the module and dedicated I.S power supply, can be conveniently segregated into it's own isolated zone.

The fibre-optic link between the module and an Pempek OBP processor module provides real-time control and monitoring of all I/O points.

This solution is ideal for mobile mining equipment where limited installation space must be managed.

Uniquely Keyed Type Connectors to prevent incorrect machine installation.

The module is Dual Pempek OBP Type which complies with AS/NZS 4240 standard.

As per standard every output includes two switches A&B in series with monitoring feedbacks from both.

Extra safety is achieved by using two potted boards where each includes main and watchdog processors monitoring correctness of executed main software code.

**Module Primary board - A18_B0L32
Module Secondary board - A19_A20_B0MWJ**



Mounting options can vary depending on customer requirements.

Specifications

- **Module Type:** Intrinsically Safe Input / Output with Display
- **Supply:** 12VDC (+/- 10%) / 20 Watts (Max) from Approved I.S. Power Supply
- **Data Communications:** CAN interface over Pempek OBP Fibre
- **Operating Temperature:** -20°C to +85°C all industrial components
- **Inputs 1:** 24 x I.S. Digital Inputs (12VDC)
- **Inputs 2:** 12 x I.S. Analog Inputs (4-20 mA)
- **Inputs 3:** 16 x I.S. Resistive Inputs
- **Inputs 4:** 4 x I.S. Analog Inputs (0-10V)
- **Outputs:** 24 x I.S. 12VDC On/Off Outputs (1A Maximum for each Output)
- **Connector 1:** Pempek OBP Fibre
- **Connector 2:** Pempek OBP A18 (12VDC I.S. Supply and Solenoid Outputs)
- **Connector 3:** Pempek OBP A19 (12VDC I.S. Supply and 12 Bit Resistive Inputs)
- **Connector 4:** Pempek OBP A20 (Digital Inputs and 12 Bit Analog Inputs 4-20mA and 12 Bit Analog Inputs 0-10V)


Heavy Duty Enclosure

- Electroless Nickel Plated
- Rugged Construction

Mass

- 6.5kg (14.3lb)

L0MW0301 Solenoid Module Pempek OBP Intrinsically Safe I/O 12 Bit Resistive Inputs Type A

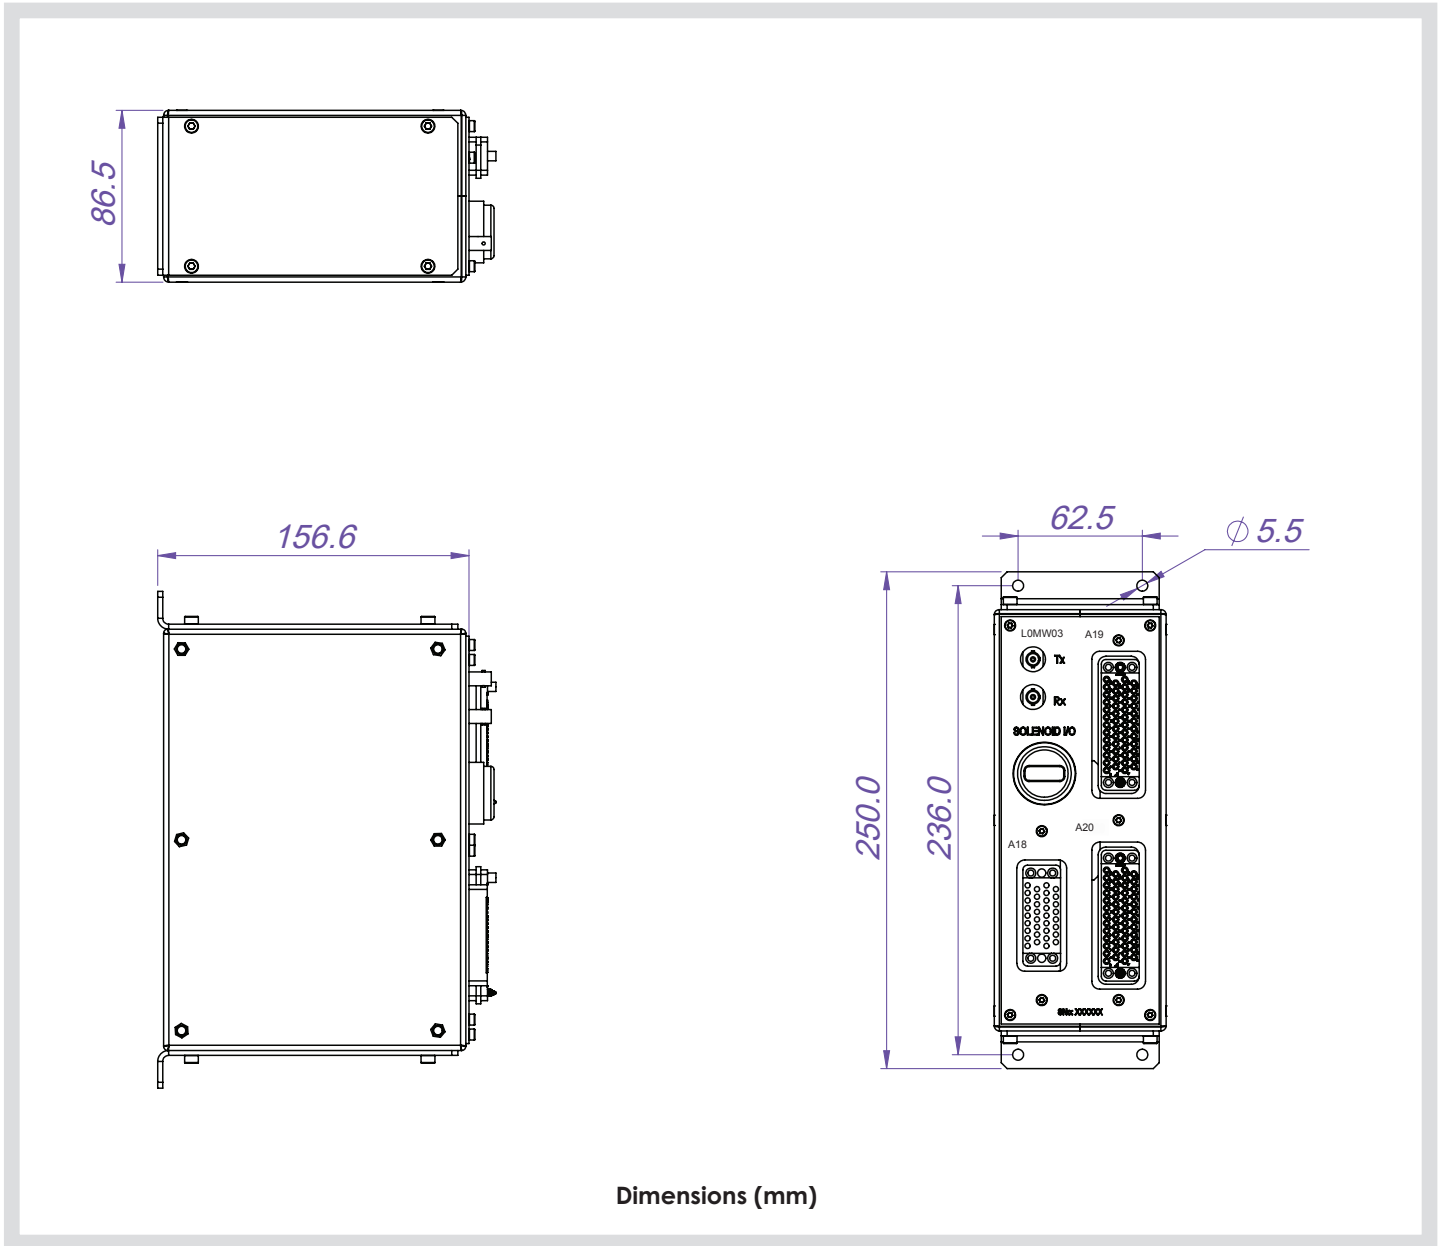

L0MW0301 Solenoid Module Pempek OBP Intrinsically Safe I/O 12 Bit Resistive Inputs Type A

Display Diagnostics

The integral 4 character LED Matrix display provides the end user with some basic diagnostics as to the operation of the module. These messages are as follows:

ON - No Faults

FEBK - Outputs Feedback Fault

SHRT - Output Short Fault

CAN - Fibre-optic CAN Bus Fault

Message Explanation Result

ON

Omni Flashing Indicates nominal operation and signifies that CAN communications has been established with a host. Normal Operation Permitted

CAN

Indicates CAN Communication has not been established or has been lost. Outputs Disabled

FEBK

Indicates that internal are NOT congruent with requested outputs. This typically occurs when an output has been requested but has failed to operate indicating a supply failure or wiring error. Outputs Disabled

SHRT

Indicates that a short-circuit condition has been detected a requested output. This short-circuit could be external (most probable) or internal



L0MW0301 Solenoid Module Pempek OBP Intrinsically Safe I/O 12 Bit Resistive Inputs Type A

CONNECTOR A18

Number	Unit / PCB VMCT-34F Female Board Mount PIN	L0MW0301 Name
1	A	SOLENOID-5
2	B	SOLENOID-11
3	C	SOLENOID-2
4	D	SOLENOID-8
5	E	SOLENOID-4
6	F	SOLENOID-10
7	H	SOLENOID-1
8	J	SOLENOID-7
9	K	SOLENOID-3
10	L	SOLENOID-9
11	M	MODULE SELECT-1
12	N	SOLENOID-6
13	P	SOLENOID-12
14	R	SOLENOID-13
15	S	MODULE SELECT-2
16	T	SOLENOID-14
17	U	SOLENOID-15
18	V	SOLENOID-16
19	W	MODULE SELECT-3
20	X	SOLENOID-17
21	Y	SOLENOID-18
22	Z	SOLENOID-19
23	AA	MODULE SELECT-4
24	BB	SOLENOID-20
25	CC	
26	DD	SOLENOID-21
27	EE	
28	FF	SOLENOID-22
29	HH	
30	JJ	SOLENOID-23
31	KK	
32	LL	SOLENOID-24
33	MM	OVIS
34	NN	12VIS



Image depict coding pins required

L0MW0301 Solenoid Module Pempek OBP Intrinsically Safe I/O 12 Bit Resistive Inputs Type A

CONNECTOR A19

Number	Unit / PCB GMCT50F Female Board Mount PIN	L0MW0301 Name
1	A	SUPPLY-PROX-SW-1
2	B	ANALOG-1 Resistive Input
3	C	SUPPLY-PROX-SW-2
4	D	ANALOG-2 Resistive Input
5	E	SUPPLY-PROX-SW-3
6	F	ANALOG-3 Resistive Input
7	H	
8	J	
9	K	SUPPLY-PROX-SW-4
10	L	ANALOG-4 Resistive Input
11	M	
12	N	
13	P	SUPPLY-PROX-SW-5
14	R	ANALOG-5 Resistive Input
15	S	
16	T	
17	U	SUPPLY-PROX-SW-6
18	V	ANALOG-6 Resistive Input
19	W	SUPPLY-PROX-SW-7
20	X	ANALOG-7 Resistive Input
21	Y	SUPPLY-PROX-SW-8
22	Z	ANALOG-8 Resistive Input
23	a	
24	b	
25	c	SUPPLY-PROX-SW-9
26	d	ANALOG-9 Resistive Input
27	e	
28	f	
29	h	SUPPLY-PROX-SW-10
30	j	ANALOG-10 Resistive Input
31	k	
32	m	
33	n	SUPPLY-PROX-SW-11
34	p	ANALOG-11 Resistive Input
35	r	SUPPLY-PROX-SW-12
36	s	ANALOG-12 Resistive Input
37	t	SUPPLY-PROX-SW-13
38	u	ANALOG-13 Resistive Input
39	v	
40	w	
41	x	SUPPLY-PROX-SW-14
42	y	ANALOG-14 Resistive Input
43	z	
44	AA	
45	BB	SUPPLY-PROX-SW-15
46	CC	ANALOG-15 Resistive Input
47	DD	SUPPLY-PROX-SW-16
48	EE	ANALOG-16 Resistive Input
49	FF	0VIS
50	HH	12VIS

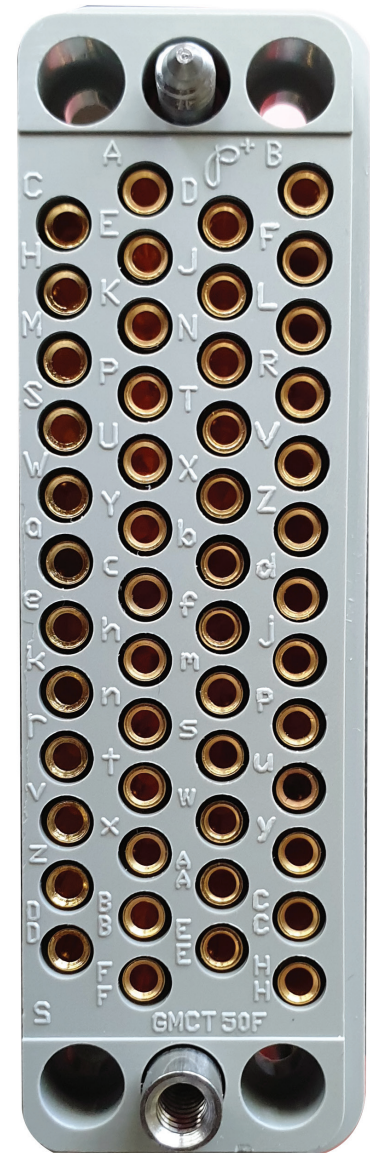


Image depict coding pins required

L0MW0301 Solenoid Module Pempek OBP Intrinsically Safe I/O 12 Bit Resistive Inputs Type A

CONNECTOR A20

Number	Unit / PCB GMST50F Female Board Mount PIN	L0MW0301 Name
1	A	INP1
2	B	INP2
3	C	INP3
4	D	INP4
5	E	INP5
6	F	INP6
7	H	INP7
8	J	INP8
9	K	INP9
10	L	INP10
11	M	INP11
12	N	INP12
13	P	INP13
14	R	INP14
15	S	INP15
16	T	INP16
17	U	INP17
18	V	INP18
19	W	INP19
20	X	INP20
21	Y	INP21
22	Z	INP22
23	a	INP23
24	b	INP24
25	c	
26	d	MODULE SELECT-4
27	e	
28	f	MODULE SELECT-3
29	h	
30	j	MODULE SELECT-2
31	k	
32	m	MODULE SELECT-1
33	n	AN17 High Resolution 12 Bit 4-20mA
34	p	AN18 High Resolution 12 Bit 4-20mA
35	r	AN19 High Resolution 12 Bit 4-20mA
36	s	AN20 High Resolution 12 Bit 4-20mA
37	t	AN21 High Resolution 12 Bit 4-20mA
38	u	AN22 High Resolution 12 Bit 4-20mA
39	v	AN23 High Resolution 12 Bit 4-20mA
40	w	AN24 High Resolution 12 Bit 4-20mA
41	x	AN25 High Resolution 12 Bit 4-20mA
42	y	AN26 High Resolution 12 Bit 4-20mA
43	z	AN27 High Resolution 12 Bit 4-20mA
44	AA	AN28 High Resolution 12 Bit 4-20mA
45	BB	AN29 High Resolution 12 Bit 0-10V
46	CC	AN30 High Resolution 12 Bit 0-10V
47	DD	AN31 High Resolution 12 Bit 0-10V
48	EE	AN32 High Resolution 12 Bit 0-10V
49	FF	
50	HH	OVIS

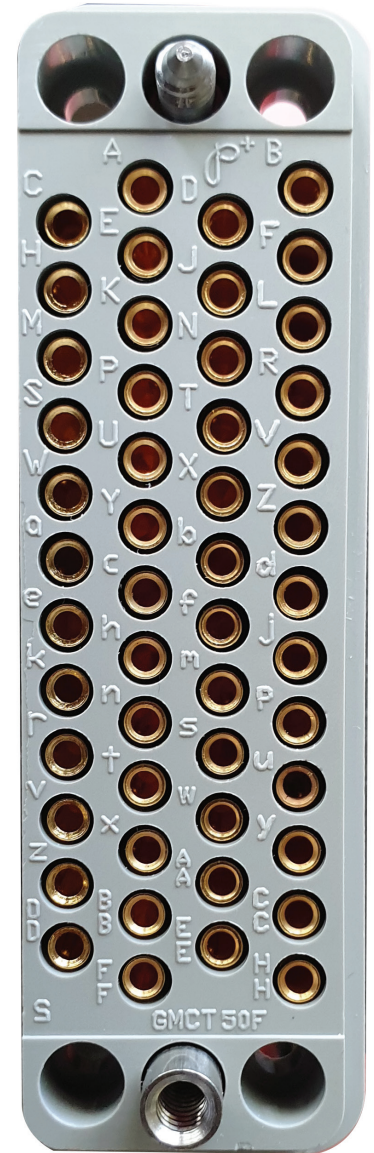


Image depict coding pins required

L0MW0301 Solenoid Module Pempek OBP Intrinsically Safe I/O 12 Bit Resistive Inputs Type A

Fibre Optic Patch Cables

Part Number	Description
H0LW0401	Fibre Optic Patch ST-ST Multi-Mode
H0M10101	Connector Assembly Fibre 8 way 7m
H0M10201	Connector Assembly Fibre 8 way 10m
H0M10301	Connector Assembly Fibre 8 way 1m
H0M10401	Connector Assembly Fibre 8 way 4m
H0M10801	Connector Assembly Fibre 8 way 8m
H0M10901	Connector Assembly Fibre 8 way 11m
H0M11001	Fibre Optic Patch Assembly 8 way 3m
H0M11201	Connector Assembly Fibre 8 way 12.5m



Image above Fibre Optic Patch ST-ST Multi-Mode

Specifications

- **Product Type:** Pre-manufactured cable assembly
- **Construction:** Fibre Optic with ST terminations
- **Connector 1 :** Fibre Optic Tx
- **Connector 2:** Fibre-optic Rx
- **Pin Type:** ST Fibre Plugs
- **Conductor Type:** Multi-mode Fibre-optic
- **Insulation Rating:** N/A
- **Temperature Rating:** -40°C to 85°C

Connector Assembly

Part Number	Description
H0LW0101	Connector Assembly A18 2.2m
H0LW0201	Connector Assembly A19 2.2m
H0LW0301	Connector Assembly A20 2.2m
H0LW0801	Connector Assembly A18 1.5m
H0LW0802	Connector Assembly A18 1.5m Small Plug
H0LW0803	Connector Assembly A18 1.5m Fully Populated
H0LW0901	Connector Assembly A20 5m
H0LW0902	Connector Assembly A20 1.5m
H0LW0903	Connector Assembly A20 Fully Populated 1.5m



Specifications

- **Product Type:** Pre-manufactured cable assembly
- **Construction:** Connector with flying leads (pigtail)
- **Pin Type:** Male (Gold-plated)
- **Conductor Type:** PVDF Tinned Stranded Wire
- **Insulation Rating:** 600 volts
- **Temperature Rating:** -65 to 105 C
- **Recommended Tools:** PVDF / Teflon Insulation Stripping Tool

Cable options can vary depending on customer requirements.