


LONT0701 Pempek OBP Proportional Solenoid I/O Module 24VDC Type G

The LONT Industrial Solenoid I/O Module range is designed to directly support 24VDC Solenoid applications together with a range of other I/Os. Additional analogue and digital input support make for a highly integrated I/O module.

- Embedded 24VDC Solenoid Outputs
 - 30 x Discreet Outputs with feedback output voltage monitoring.
 - 6 x Proportional Outputs with feedback current monitoring
 - Switched Coil Supply & Return
 - Multi-Stage Diagnostic Monitoring
 - Sequential Switching Redundancy
 - Microprocessor Controlled
- Embedded Proximity Inputs
 - 15 x 24VDC Proximity Inputs
 - Microprocessor Sampling
- Embedded Counters Inputs
 - 4 x Counter Inputs
 - 2 x Configurable Count Inputs
 - 20Hz to 6.5KHz
 - Quadrature Configurable.
- Embedded Analog Inputs
 - 12 x 4-20mA Inputs
 - Microprocessor Sampling
- Embedded Digital Inputs
 - 8 x 110VAC Digital Inputs
 - Microprocessor Sampling
- CAN Network
 - Opto-Coupler Isolation
 - CAN 2.0B Compatible
- Operates -10°C to +85°C
 - All industrial components
- Heavy Duty Enclosure
 - Electroless Nickel Plated
 - Rugged Construction

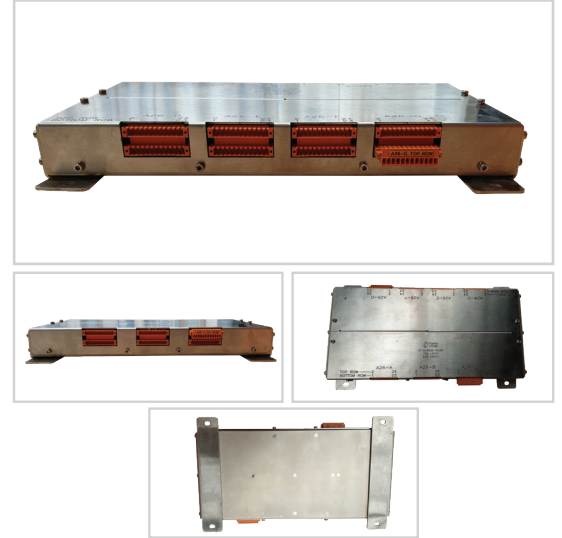

Typical Applications

- Continuous Bolter/Miners
- Continuous Haulage
- Long Wall Shearers
- Mobile Bolters
- Mobile Roof Supports
- Remote Control Scoops
- Remote Control Loaders
- Any industrial switching application

Interface Description

The Type LONT Solenoid Module utilizes industrial connectors that are unique when configured for use with the Pempek OBP Control System. 7x24(12 A-BOTTOM, 12 B-TOP) way connectors.

Each module in the series is allocated a unique connector prefix for schematic reference purposes. For example, LONT0101 is allocated prefixes A26-A, A26-B whilst LONT0201 has B26-A and B26-B etc.

Plugs are marked as X26A, .. X26G (where X is module type A, B, C, D, E, F, G, H)

LONT0701 Pempek OBP Proportional Solenoid I/O Module 24VDC Type G

LONT Solenoid Module Connector A26G (Bottom) – Klippon 12 Pin Female

Pin	Description	Signal
1	Digital Input Reference	110VAC Neutral
3	Digital Input 2	110VAC Input
5	Digital Input 4	110VAC Input
7	Digital Input 6	110VAC Input
9	Digital Input 8	110VAC Input
11	Supply Input Return	0VDC Return
13	Supply Input Return	0VDC Return
15	Supply Input Return	0VDC Return
17	Supply Input Return	0VDC Return
19	Supply Input Return	0VDC Return
21	Supply Input Return	0VDC Return
23	Supply Input Return	0VDC Return

LONT Solenoid Module Connector A26G (Top) – Klippon 12 Pin Female

Pin	Connector A26B (Top) – Klippon	Signal
2	Digital Input 1	110VAC Input
4	Digital Input 3	110VAC Input
6	Digital Input 5	110VAC Input
8	Digital Input 7	110VAC Input
10	-	-
12	Supply Input	24VDC Supply Input
14	Supply Input	24VDC Supply Input
16	Supply Input	24VDC Supply Input
18	Supply Input	24VDC Supply Input
20	Supply Input	24VDC Supply Input
22	Supply Input	24VDC Supply Input
24	Supply Input	24VDC Supply Input

² Solenoids Designated xA / xB can only be operated exclusively. For example, outputs 9A or 9B can be energised independently but not simultaneously.

LONT0701 Pempek OBP Proportional Solenoid I/O Module 24VDC Type G

Electrical Characteristics

Supply

Voltage ^{Module}	24VDC ^{Nominal}
Wattage ^{MIN}	5W
Wattage ^{MAX}	12W
Voltage ^{Solenoids}	24VDC ^{Nominal}
Wattage ^{MIN}	0W
Wattage ^{MAX}	240W

Solenoid Outputs

Installed	30 Redundant Discreet
Voltage	24VDC
Minimum Voltage	24VDC
Maximum Voltage	24 ^{VDC}
Installed	6 Redundant Proportional
Voltage	24VDC
Minimum Voltage	24VDC
Maximum Voltage	24VDC

Proximity Inputs

Installed	15
Voltage	24VDC
Minimum Voltage	24VDC
Maximum Voltage	24VDC

Digital Inputs

Installed	8
Voltage	110VAC
Minimum Voltage	75VAC
Maximum Voltage	130VAC

Analog Inputs

Installed	12
Type	4-20mA
Scale	10-Bit
Maximum Voltage	5VDC

Communications

Interface	CAN 2.0B
Throughput	500kbs (Supports Autobaud)
Protocol(s)	Message Oriented
Medium	Copper


LONT0701 Pempek OBP Proportional Solenoid I/O Module 24VDC Type G

Electrical Characteristics

Environmental

Operating Temperature	Minus 20°C to +85°C
Humidity	T.B.A.
MTBF	12,000 hours

Mechanical Characteristics

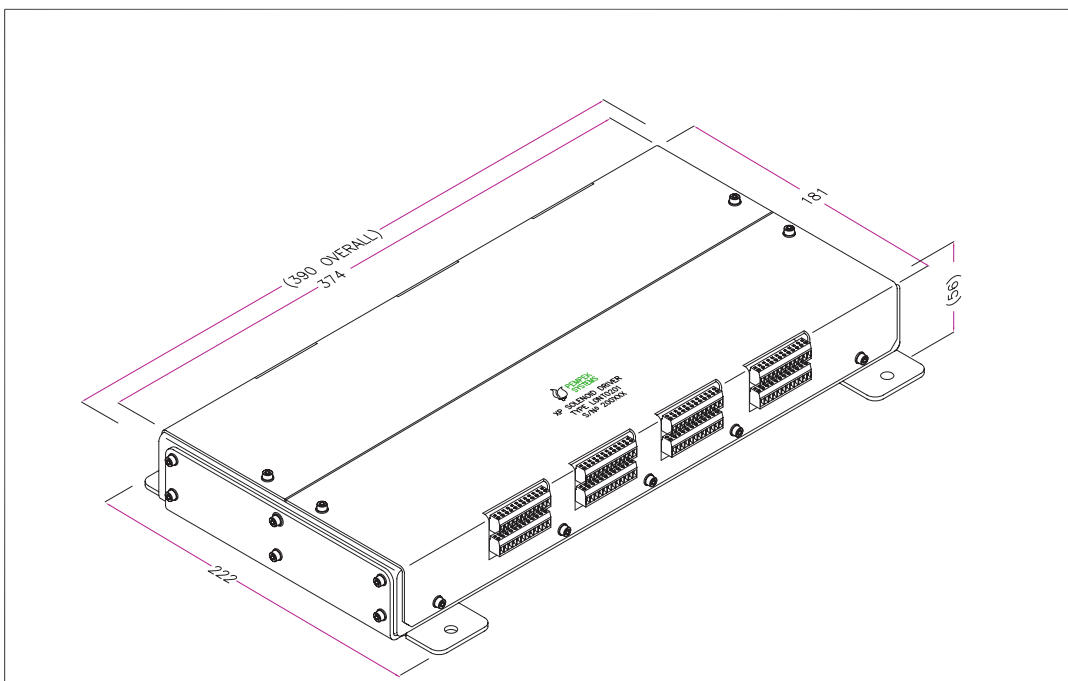

Dimension	Measurement	Description
A	222	Mounting Flange Width
B	390	Length
C	181	Width
D	60	Height

Notes

- All dimensions are in millimetres.

Material

- Enclosure is Electroless nickel plated mild steel.
- Facia is stainless steel.
- Mounting brackets are stainless steel.

Fasteners

- M5 x 10mm x 4
- M4 x 10mm x 24

Mass

- 3.5kg (7.7lb)